

Compacted Soil Column & Compacted Aggregate Pier

CSC

CAP



Geologic Hazard Application

- Soft/Loose Soil
- Slope Stability
- Contaminated Soil

Diameter/Depth
18, 24, 30 in dia
6 - 32 ft deep

Compatible Soils
Silt (ML, MH)
Clay (CL, CH)
Clayey Sand (SC)
Silty Sand (SM)
Undocumented Fill

Bearing Capacity Range
4,000 - 9,000 psf

Key Advantages

- Cost effective support
- Readily available material - CAP
- LEED opportunity
- Re-use onsite soil - CSC
- High bearing capacity
- Uplift-tension hold-down

Key Considerations

- Vibration system
- Requires confinement in liquefiable layers
- Spoil haul-off - CAP
- Semi-rigid inclusion
- Casing
- Moderate depth limit

Comparable To

- Overex/replace
- Concrete piers
- Driven piles
- Geopier®
- Soil mix columns

Overview

Compacted Soil Column and Compacted Aggregate Pier (CSC and CAP) are soil-replacement, ground improvement methods. CSC/CAP are like rammed piers, aggregate piers, sand piers, and compacted soil/soil-cement columns. CSC/CAP improve soft clays and silts, loose sands, undocumented fills, and compressible soil. The CSC/CAP process constructs strong, engineered, "composite ground" for the support of foundations and slabs. CSC/CAP improve the ground by vertical and horizontal compaction of lifts of select material like crushed rock, sand, recycled material, and soil-cement mixes. Compressible soil is drilled out and replaced with the select material that is rammed into dense compacted lifts that expand the drilled cavity. The ramming of the select material creates a cavity expansion effect that increases soil strength and stiffness, resulting in higher bearing capacity and reduced soil compressibility. CSC/CAP provide strong, composite ground to support conventional foundations, slabs, and mats with reduced settlement.

CSC/CAP Applications


Support foundations, structural mats, slabs, embankments, tanks, MSE walls, and industrial equipment. The ideal applications for CSC/CAP:

- 1) Soft clay, silty clay, silty and sandy clay, and loose soil sites.
- 2) Compressible soil sites.
- 3) Undocumented fill sites.
- 4) Gain LEED® points at sites with local and recycled concrete.
- 5) Sites where drilled holes will stand open during construction.
- 6) Sites near occupied buildings and in dense urban areas.



CSC CAP Compacted Soil Column & Compacted Aggregate Pier

4-Step Construction Process

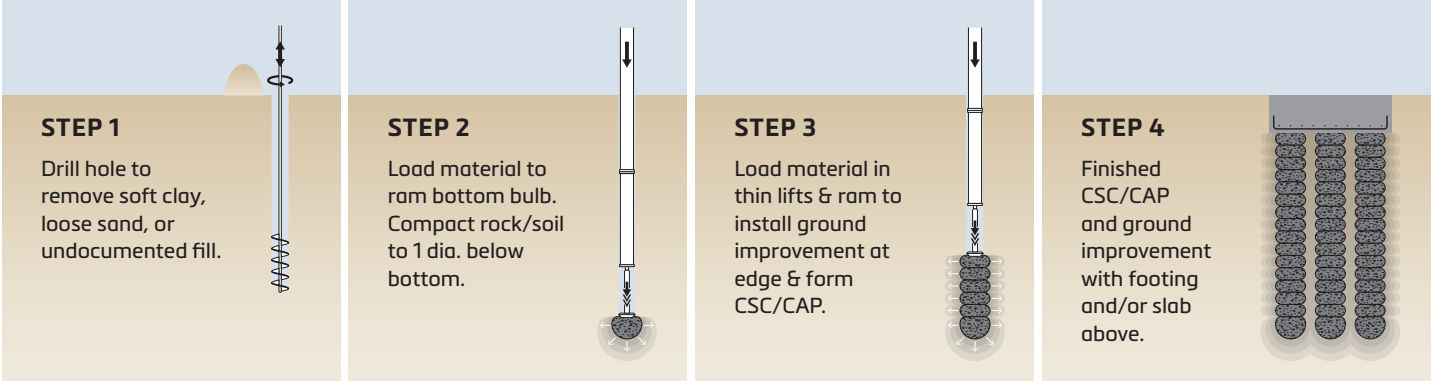

Technical Details

Compacted Soil Column and Compacted Aggregate Pier (CSC and CAP) provide excellent ground improvement support of foundations and slabs. The CSC/CAP process uses rammed and compacted select material in a drilled hole to form strong, engineered, “composite ground.” Select materials include crushed rock, sand, recycled material, and engineered soil-cement mixes. The CSC/CAP compaction process is applied to each lift of select material. The compaction force causes the select material to compact and to press laterally into a drilled hole; resulting in a coarse-sided CSC/CAP with a finish diameter greater than the drill diameter. CSC/CAP produces cavity expansion effects on the adjacent soil that 1) increase lateral confining pressure, 2) increase shear strength, 3) increase over-consolidation ratio, 4) reduce void ratio, and 5) increase soil stiffness. As CSC/CAP composite ground is loaded, high friction forces at the edges resist load and transfer the footing stress out and lower into the soil profile. A CSC/CAP is akin to a stiff spring that is confined in a soft spring medium (the native soil), where the stiff spring will attract more load and resist compression by virtue of the very dense lifts of compacted select material.

Most CSC/CAP are 5 to 25 feet deep and occupy between 5% to 25% of the footing bottom. CSC/CAP installed with local and recycled materials qualify for sustainability and LEED® points. CSC/CAP can be equipped with steel anchors to resist net tension forces. Full-scale load tests to 200% confirm the design bearing capacity on all projects.

Farrell uses excavators with hydraulic hammer attachments to install CSC/CAP. The hammering tool is designed to compact an 18 to 24-inch thick lift of select material. CSC/CAP diameters are 18, 24, and 30-inches.

CSC/CAP are cost effective, settlement control, ground improvement systems that support your project to **Go Vertical with Confidence.®**

Testimonial



UC Davis Brewery/Winery and Food Pilot Facility
Davis, CA

“The recycled concrete content in the system really made this a double win as we saved money for the project instead of using concrete drilled piers and we enhanced sustainability for the project.”

John Westphal, SE
KPW Structural

